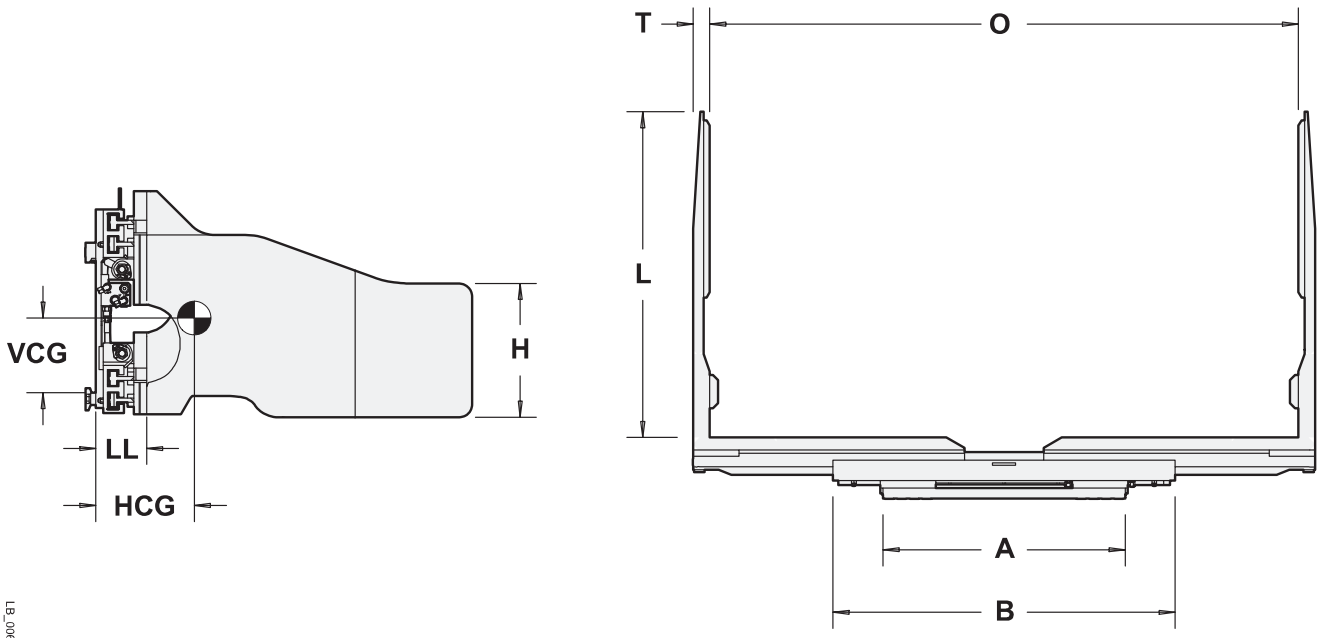


SPECIFICATIONS

	Capacity	4000 lbs. @ 24 in. load center
	Mounting	ITA II
	Lower Hook	bolt-on
B	Frame Width	64.0 in.
H	Arm Height	18.0 in.
L	Arm Length	33.0 in.
T	Arm Thickness	2.5 in.
O	Minimum Opening	19.75 in.
O	Maximum Opening	92.0 in.
A	Hook Spread	37.5 in.
	Weight	1570 lbs.
LL	Lost Load	6.88 in.

HCG	Horizontal CG	9.3 in.
VCG	Vertical CG	10.4 in.
	Lateral CG	11.9 in. @ maximum shift
	Maximum Offset	18.06 in.
	Hydraulics	Side Shifting
	Recommended Pressure	2250 psi
	Maximum Pressure	2400 psi
	Minimum Flow	12.0 gpm
	Recommended Flow	16.0 gpm
	Maximum Flow	20.0 gpm

Hydraulic flow less than recommended will reduce operating speed.

Hydraulic flow greater than maximum will generate excess heat and can reduce system life.